

## Justering av hengsler.


1. Du trenger 5mm umbrako.



2. Hengslene står montert på døren (3 stk.).




3. Skru av proppen på toppen av hengsle (3 stk.).

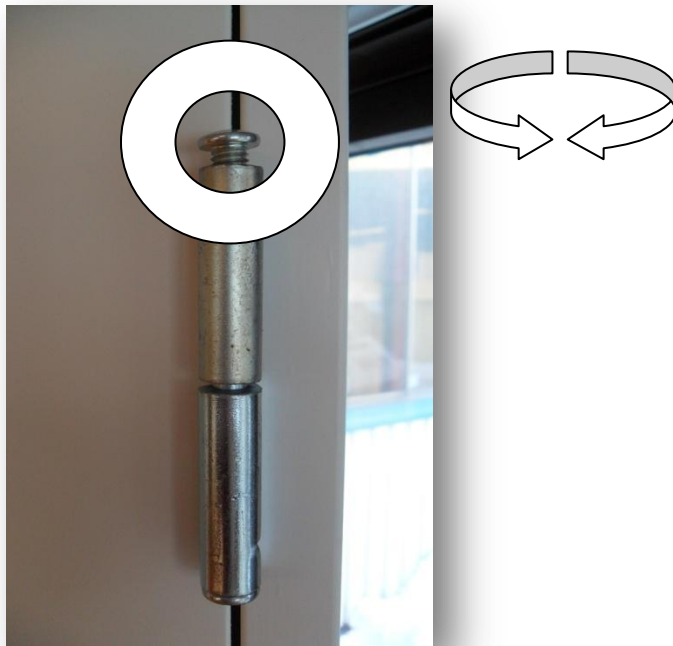

4. Umbrako skruie står nedi hengsla.



5. Skru med klokken, døren heves, mot klokken, døren senkes.



6. Døren skal heves, så den nesten subber karmtopp.  
Mest mulig glippe mellom dørblad og terskel, så vann ikke trekker opp i dørblad.

